
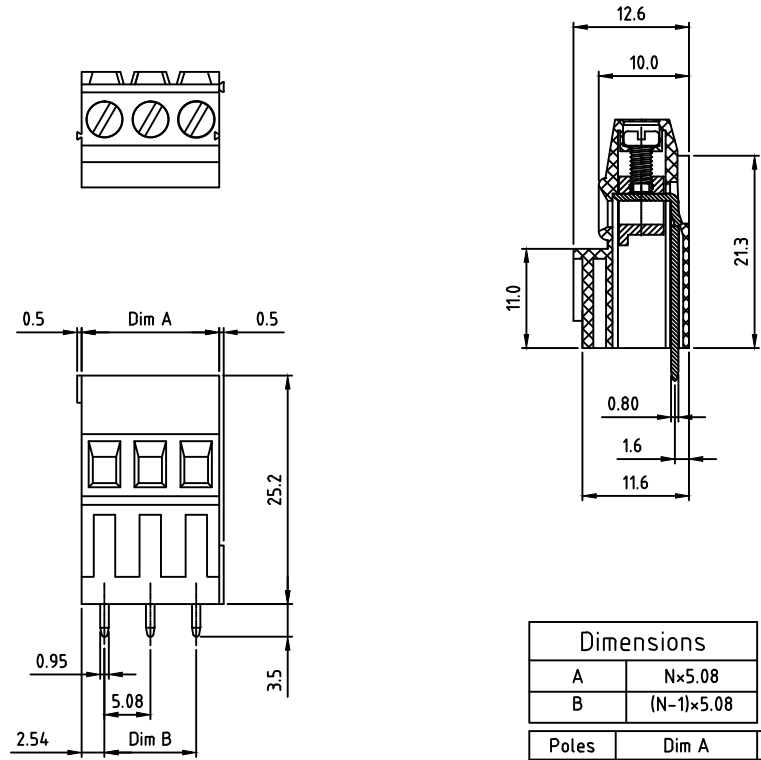


SPECIFICATIONS


- Voltage Rating: 300VAC
- Current Rating: 10 Amps
- Dielectric withstanding: 1.6KV
- Soldering Temperature: 250°C±10°C/5 Sec
- Operating Temperature: -40°C to +115°C
- Wire Guard Solder Pin: Brass, Tin Plated
- Terminal Screw: Steel Zinc plating "-" slot type
- Insulator Material: Thermoplastic, UL 94V-0
- Wire Range:
- Wire Strip Length: 6-7mm
- Solid/Stranded Wire: 12-24 AWG
- Torque: 3.5Lb-In
- Clamp: Brass(CuZn) Ni plated
- Screw: M2.5
- Safety Approval: us




Dimensions	
A	N×5.08
B	(N-1)×5.08

Poles	Dim A	Dim B
2P-6P	±0.15	±0.15
7P-12P	±0.25	±0.25
13P-18P	±0.35	±0.35
19P-24P	±0.40	±0.40

N=Number of contacts

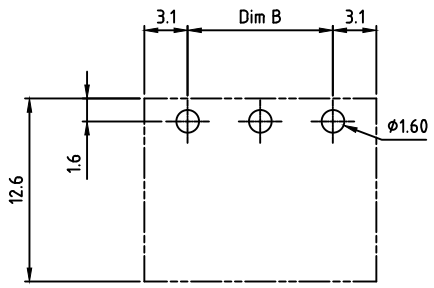


APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

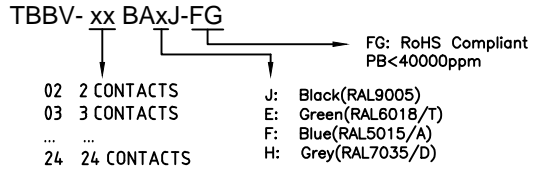

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X. ± 1"
.X ± 0.30	.X ± 1"



REV. C	DRAWN	06/30/05	TBBV Series
DATE 06/29/2017	CHECKED		5.08 mm Terminal Block - 2nd Level
SCALE As shown	APPROVED		PRODUCT NO. TBBV-XXBAXJ-FG
UNIT mm		SIZE A4	FILE NAME: TBBV-XXBAXJ-FG LF APD.DWG